


PRODUCT SPECIFICATIONS

Product	Midnight NeXT Generation 26 (MNXT26)
Code	LFGMNXT26
Colour	Midnight Black
Length	5.6m
Width	100mm
Depth	26mm
Material	Anodised Aluminium
Applications	Indoor and Outdoor
Features	 No tracking Choice of waste outlets Joiners for easy extension Easy roll out feature for cleaning and maintenance Lifetime Rustproof Warranty UV Stable



^{*} Total length is 5.8m, total usable length is 5.6m to allow for any wastage during the anodising process.

Warranty information and Care & Maintenance can be found at www.lauxesdrains.com

Disclaimer: All Lauxes drains and accessories hold WaterMark Certification in accordance with WMTS - 040.


^{*} Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the drains.

CUTTING INSTRUCTIONS AND INSTALLATION

For ease of cutting Lauxes drains, we recommend using a compound mitre saw fitted with a multi-material cutting blade 80 tooth or more . We also recommend using a Lauxes TCT hole saw to drill the hole for the waste outlet

- 1. Cut the bottom tray 3mm shorter than desired length to allow end caps to be fitted.
- 2. Cut the top drain 1mm shorter than the bottom tray to allow for easy rollin of top drain and tidy fit.

- 3. Using a suitable size Lauxes hole saw for your pop waste, drill out the hole at the required position to align with the waste pipe in the floor.
- 4. Insert the end caps into bottom tray and secure with a bead of silicone on the outside of tray.
- 5. Place silicone around the lip of the pop waste and secure to the underside of bottom tray at the recently drilled hole.
- * During installation use a template to ensure the drain does not come in contact with any wet cement based products.

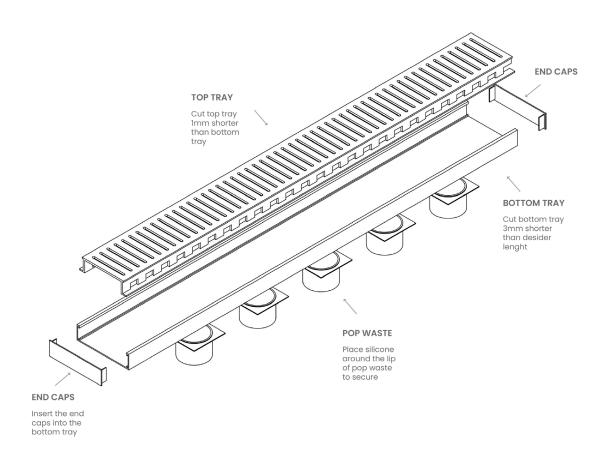

Installation to be by a licensed plumber and in accordance with AS/NZS 3500.2.